


Since 1989

**EASYFLEX®**

**Water Heater Connectors**

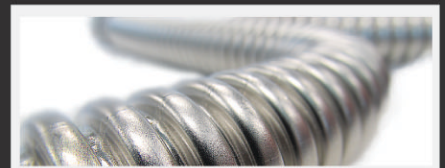

[www.easyflexusa.com](http://www.easyflexusa.com)

## Applications

Boilers  
Water Heaters  
Tankless Water Heaters

## Sizes & Fittings

3/4" ID | 1" ID | 1-1/4" ID | 1-1/2" ID | 2" ID

3/4" FIP x 3/4" FIP, 3/4" MIP, 3/4" Push-Fit, 1" FIP, 1-1/4" FIP  
1" FIP x 1" FIP, 1-1/4" FIP  
1-1/4" FIP x 1-1/4" FIP  
1-1/2" FIP x 1-1/2" FIP  
2" FIP x 2" FIP

## Lengths

12" | 15" | 18" | 24" | 36" | 48"

## Specifications

CSST: Stainless Steel 304 (ASTM A240)  
Fittings: Chrome-Plated Brass 3771  
Gasket: High Quality EPDM  
Working Pressure: Up to 125 psig  
Intermittent Impulse Pressure: Up to 180 psig  
Temperature: -40° F to 180° F  
Minimum Bend Radius: 2.5"  
100% Leak Tested

## Certifications & Approvals

IAPMO/UPC Certified  
ASME A 112.18.6 / CSA B125.6  
NSF 61 Compliant  
AB 1953 Compliant: LEAD FREE

**EASYFLEX**®

1371 Santa Fe Dr.  
Tustin, CA 92780

(888) 577-8999  
info@easyflexusa.com



www.easyflexusa.com